



air master
ISO 9001 CERTIFIED COMPANY



LINEAR SLOT DIFFUSERS



www.airmasteremirates.com



INDEX

SECTION	TOPIC	PAGE
SLOT DIFFUSERS		
7.1	Supply Air Linear Slot Diffuser ASLD	3
7.2	Return Linear Slot Diffusers ARLD	4
7.3	• Slot Diffuser dimensions	5
7.3	• Possible air deliveries	5
7.4	Curved Supply Linear Slot Diffusers ASLD (C)	6
7.5	• Optional mitered corners	7
7.5	• Flange models	7
7.6	• Optional profiles	8
7.6	• Fixing details	8
7.21	• Product summary and order checklist	23
7.16	Linear Slot Diffuser ASMLD	18
7.19	Plenum Slot Diffuser ASMPD	21
AIR FLOW DATA		
7.7	Supply Linear Slot Diffuser - 20mm: ASLD Tab. 7.1	9
7.9	Supply Linear Slot Diffuser - 25mm: ASLD-25 Tab. 7.2	11
7.11	Supply Linear Slot Diffuser - 16mm: ASLD-16 Tab. 7.3	13
7.13	Return Linear Slot Diffusers - 20mm: ARLD Tab. 7.4	15
7.14	Return Linear Slot Diffuser - 25mm: ARLD-25 Tab. 7.5	16
7.15	Return Linear Slot Diffuser - 16mm: ARLD-16 Tab. 7.6	17
7.17	Linear Slot Diffuser - 19mm: ASMLD	19
7.20	Plenum Slot Diffuser - 19mm: ASMPD	22

Cover Page Photo

Seef Mall Food Court, Bahrain.

CONSTRUCTION:

Frame & Blades: High quality extruded aluminium profiles.

Frame width: 30mm standard. 20mm also available

Damper: Hit and miss damper.

Slot width: 20mm as standard. 16mm, 25mm

and non standard sizes available as option.



Number of slots available: 1, 2, 3, 4, 5, 6, 7, 8.

Length: Up to 5.8mt available in a single piece.

Optional accessories: Plenum box either un-lined, internally insulated or externally insulated.

Description:

- Frame and deflection blades are made of high quality extruded aluminium profiled construction with the advantages of corrosion resistance and rigidity.
- Air distribution can be changed vertically or horizontally by means of deflection blades without changing the air flow rate. These blades can be fully adjusted from face opening.
- Air flow rate can be adjusted by fixing hit and miss damper at the rear side of the diffuser. Damper blades are adjusted from the face opening.
- Dampers are designed in a unique way that it can be used as an equalizing grid.
- Positive alignment of adjacent sections can be made by using alignment strips.
- Suitable for installation for ceiling and sills.
- Foam gasket sealed around the back of the frame to avoid air leakage.

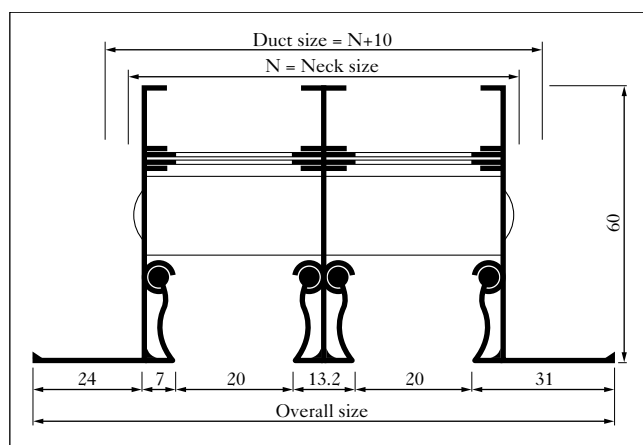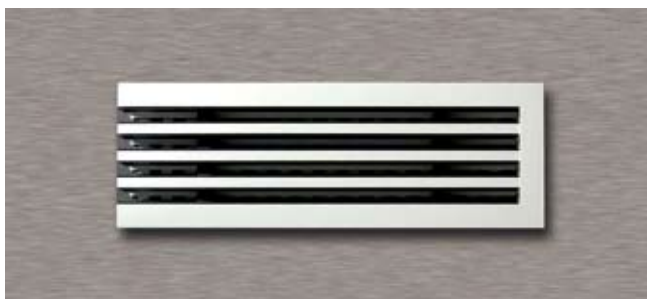

Standard finishes:

- Natural anodized aluminium finish.
- Powder coated colour finish as per RAL colour code.
- Flexibility of finish available.



RETURN AIR
LINEAR SLOT DIFFUSER**CONSTRUCTION:**

Frame & Blades: High quality extruded aluminium profiles.

Frame width: 30mm standard. 20mm also available.

Damper: Hit and miss damper.

Slot width: 20mm as standard. 16mm, 25mm

and non standard sizes available as option.

Number of slots available: 1, 2, 3, 4, 5, 6, 7, 8.

Length: Up to 5.8mt available in a single piece.



Optional accessories: Plenum box either un-lined, internally insulated or externally insulated.

Description:

- Frame and deflection blades are made of high quality extruded aluminium profiled construction with the advantages of corrosion resistance and rigidity.
- Positive alignment of adjacent sections can be made by using alignment strips that are provided with each diffuser.
- Structure is manufactured by mechanical assembly to ensure rigidity and straight line appearance.
- Available with out hit and miss damper as standard. Damper will be provided as option.
- Suitable for installation into ceiling and sills.

Standard finishes:

- Natural anodized aluminium finish.
- Powder coated colour finish as per RAL colour code.
- Flexibility of finish available.

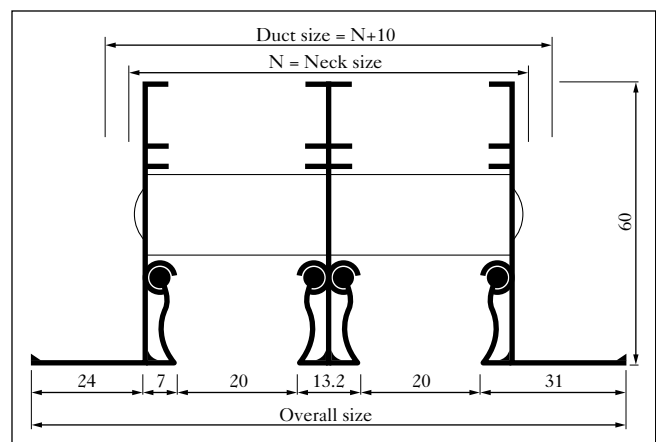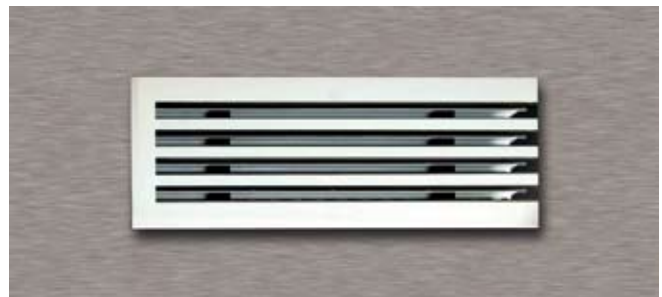

For 30mm flange width (ASLD/ARLD):

• 16mm slot opening

No. of slots	1	2	3	4	5	6	7	8
Neck size in mm	34	65	96	128	159	190	221	252
Duct size in mm	44	75	106	138	169	200	231	262
Overall size	80	111	142	174	205	236	267	298

• 20mm slot opening


No. of slots	1	2	3	4	5	6	7	8
Neck size in mm	37	71	105	140	174	208	242	276
Duct size in mm	47	81	115	150	184	218	252	286
Overall size	83	117	151	185	220	254	288	322

• 25mm slot opening

No. of slots	1	2	3	4	5	6	7	8
Neck size in mm	42	81	120	160	199	238	277	316
Duct size in mm	52	91	130	170	210	248	287	326
Overall size	88	127	166	205	245	284	323	362

- For 20mm flange width, overall size must be reduced by 20mm.
- For Curved Slot Diffuser, please increase the wall/ceiling slot 6mm.

Possible air deliveries

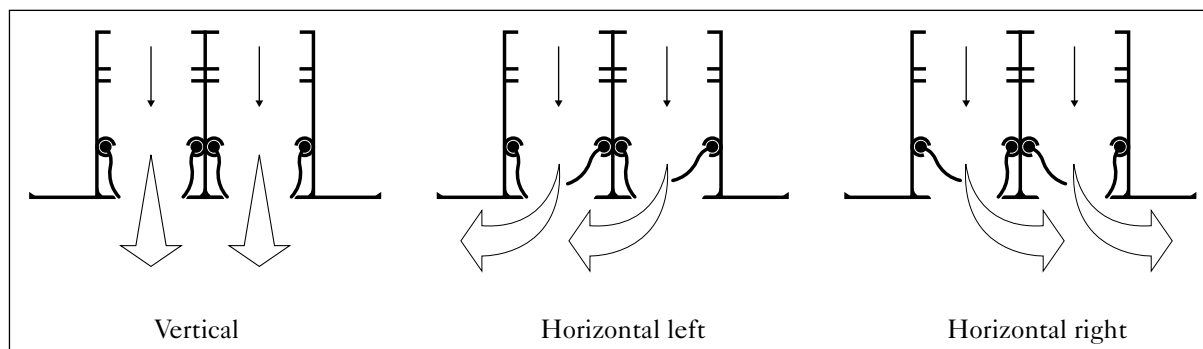

ASMLD Slot Dimensions:

No. of slots	1	2	3	4	5	6	7	8
Neck size in mm	38	76	113	151	188	225	262	299
Duct size in mm	47	86	123	161	199	235	272	309
Overall size	78	116	153	190	227	264	301	338

**CURVED SUPPLY AIR
LINEAR SLOT DIFFUSER****CONSTRUCTION:**

Frame & Blades: High quality extruded aluminium profiles.

Frame width: 30mm standard. 20mm also available.

Damper: Hit and miss damper.

Slot width: 20mm as standard. 16mm, 25mm and non standard sizes available as option.

Number of slots available: 1,2,3,4,5,6,7,8.

Length: Up to 3 mt available in a single piece.


Description:

- Frame and deflection blades are made of high quality extruded aluminium profiled construction with the advantages of corrosion resistance and rigidity.
- Hit and miss damper will be fixed rigidly at the rear side of the diffuser as option.
- Positive alignment of adjacent sections can be made by using alignment strips.
- Foam gasket is sealed around the back of the frame as option to avoid air leakage.
- Suitable for installation in ceiling and sills.
- Supply and return air curved linear slot diffusers are available up to a length of 3 meters with a minimum radius of curvature of 1 meter.
- Standard application on the ceiling.


Model: ARLD(C): Same as ASLD(C), without hit and miss damper.

Standard finishes:

- Natural anodized aluminium finish.
- Powder coated colour finish as per RAL colour code.
- Flexibility of finish available.

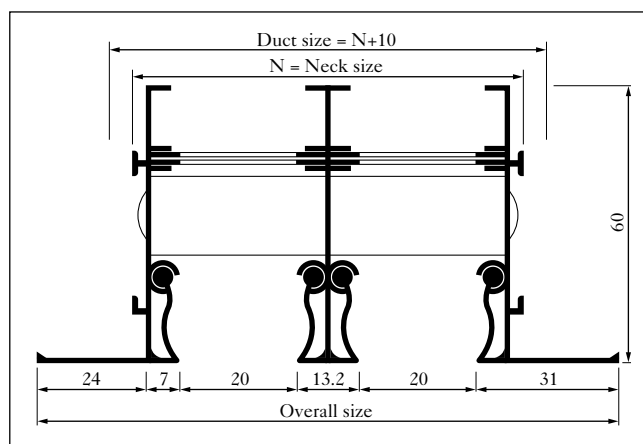


Optional mitered corners:

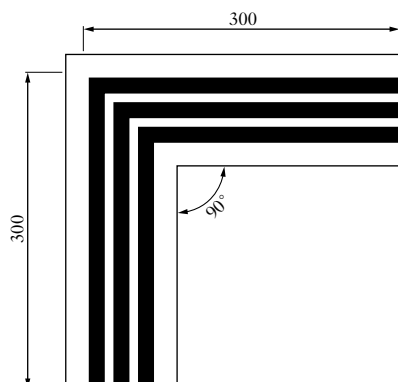


7 a. 90° Mitered corner

Standard 90° horizontal mitered corners available for floor, sill and ceiling applications.

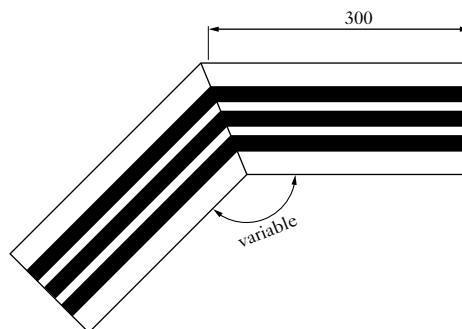


7 b. Variable mitered corner

Special horizontal mitered corners selection available for floor, sill and ceiling applications includes an angle greater than 90° and less than 180°.

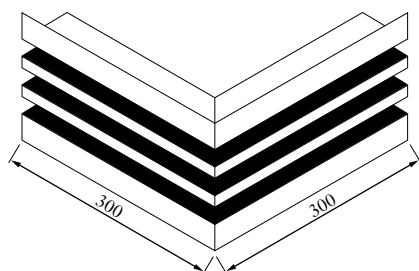

7 c. Side wall - outside corner


Vertical outside mitered corners are available for wall application at the junction of two outside walls with a standard angle of 90°.

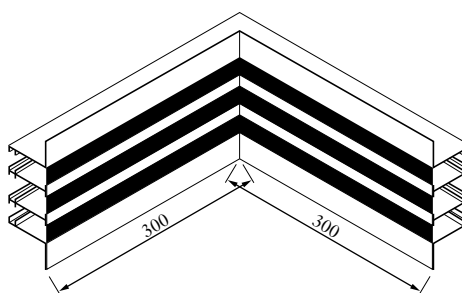


7 d. Side wall - inside corner

Vertical inside mitered corners are available for wall application at the junction of two inside walls with a standard angle of 90°.


Flange models:




With open ends




With one side flange



With both side flange



With one side end cap




With both side end cap

OPTIONAL PROFILES & FIXING DETAILS




air master
ISO 9001 CERTIFIED COMPANY

Optional profiles

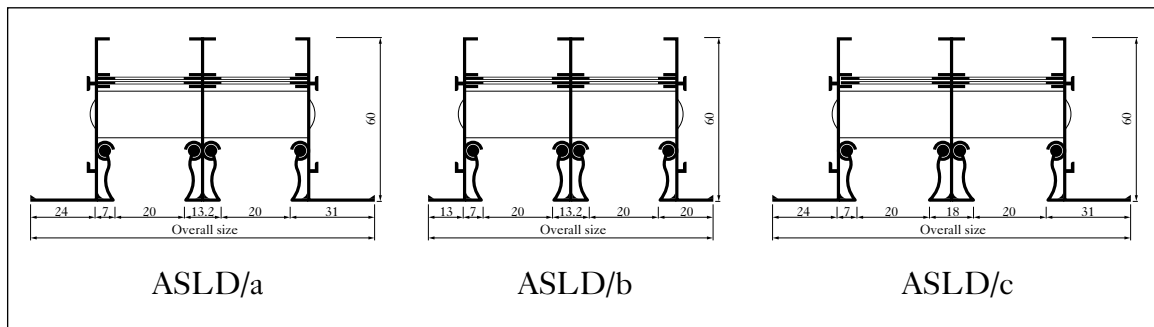

Fixing details

• C-Clamp fixing

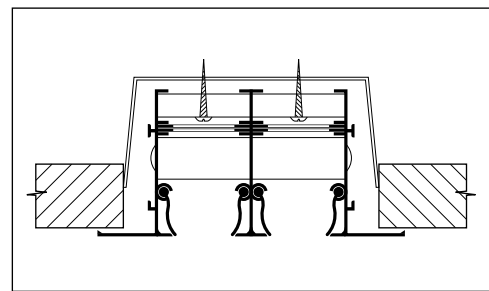

• Fixing to the plenum box

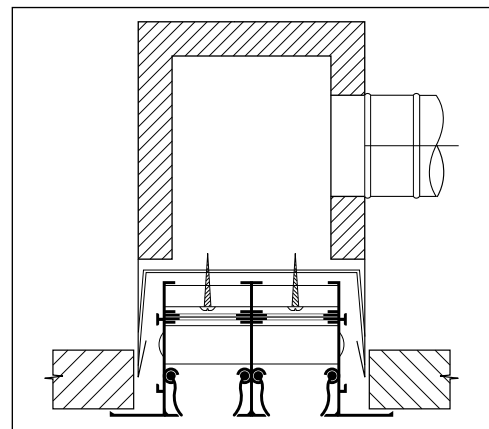


Table 7.1 Air flow data

Number of slots A_k in m ²	Air flow rate per meter length		Face Velocity m/sec	Throw in meters	P_s in mm H ₂ O	Noise Criteria (NC)
	Cfm	m ³ /sec				
1 0.0092	50	0.024	2.61	3.6 - 2.1 - 0.6	0.65	<15
	75	0.035	3.80	4.9 - 3.0 - 1.8	1.44	18
	100	0.047	5.11	6.1 - 4.3 - 2.7	2.55	30
	125	0.059	6.41	7.0 - 4.9 - 3.7	3.97	35
	150	0.071	7.72	7.6 - 5.8 - 4.6	4.37	38
	175	0.083	9.02	8.5 - 6.7 - 5.2	6.12	41
2 0.018	100	0.047	2.61	4.3 - 2.4 - 0.6	0.97	<15
	125	0.059	3.28	5.2 - 3.0 - 1.5	1.47	20
	150	0.071	3.94	6.1 - 3.9 - 2.1	2.12	28
	175	0.083	4.61	6.7 - 4.6 - 3.0	2.87	30
	200	0.094	5.22	7.0 - 5.2 - 4.3	3.73	33
	250	0.118	6.55	7.9 - 6.1 - 4.9	5.78	39
3 0.028	125	0.059	2.11	4.2 - 2.2 - 0.7	0.86	<15
	150	0.071	2.53	4.9 - 2.9 - 1.4	1.21	18
	200	0.094	3.36	5.5 - 3.7 - 2.4	2.17	25
	225	0.106	3.78	6.5 - 4.4 - 3.3	2.73	29
	250	0.118	4.21	7.6 - 5.3 - 4.0	3.34	34
	300	0.142	5.07	8.6 - 6.2 - 4.7	4.37	37
4 0.0372	150	0.071	1.91	4.6 - 2.7 - 1.1	0.72	<15
	200	0.094	2.53	5.4 - 3.6 - 2.0	1.39	21
	250	0.118	3.17	6.1 - 4.5 - 3.1	1.98	25
	300	0.142	3.82	6.7 - 5.2 - 3.9	2.85	30
	350	0.165	4.43	7.9 - 5.6 - 4.5	3.84	35
	400	0.189	5.08	8.8 - 6.7 - 5.2	4.51	38

- Data based on one meter length of the diffuser with damper fully opened.
- Face velocity is measured in m/sec.
- P_s : Static pressure loss is in mm of H₂O. Area factor in square meters.
- Throw (meters) is measured for terminal velocities of 0.25, 0.5 & 0.75 m/sec.
- NC based on a room attenuation of 10 dB.

SUPPLY
LINEAR SLOT DIFFUSER

20mm Slot width

Table 7.1(cont.) Air flow data

Number of slots A_s in m ²	Air flow rate per meter length		Face Velocity m/sec	Throw in meters	P_s in mm H ₂ O	Noise Criteria (NC)
	Cfm	m ³ /sec				
5 0.0465	250	0.118	2.54	5.8 - 4.3 - 2.7	1.43	22
	300	0.142	3.05	6.4 - 4.9 - 3.6	1.89	24
	350	0.165	3.55	6.8 - 5.3 - 3.7	2.79	29
	400	0.189	4.06	7.7 - 5.5 - 4.1	3.78	34
	450	0.213	4.58	8.5 - 5.9 - 4.7	4.25	35
	500	0.236	5.07	9.1 - 6.3 - 5.2	4.72	38
6 0.056	300	0.142	2.53	6.1 - 4.3 - 2.9	1.51	22
	350	0.165	2.95	6.6 - 5.2 - 3.9	1.64	24
	400	0.189	3.37	7.3 - 5.5 - 4.3	2.33	28
	450	0.213	3.80	7.6 - 5.8 - 4.6	3.21	31
	500	0.236	4.21	8.2 - 6.1 - 4.8	3.91	35
	600	0.283	5.05	9.2 - 6.7 - 5.3	4.78	40
7 0.065	350	0.165	2.54	6.1 - 4.3 - 2.9	1.62	22
	400	0.189	2.91	6.7 - 5.1 - 3.8	1.72	25
	450	0.213	3.28	7.0 - 5.3 - 4.0	2.33	28
	500	0.236	3.63	7.4 - 6.2 - 4.7	3.18	30
	600	0.283	4.35	8.6 - 6.7 - 5.0	4.10	36
	700	0.331	5.09	9.4 - 7.2 - 5.6	4.82	40
8 0.076	400	0.189	2.49	6.1 - 4.6 - 3.7	1.66	22
	450	0.213	2.80	6.7 - 5.1 - 3.8	1.72	25
	500	0.236	3.10	7.1 - 5.6 - 4.3	2.34	29
	600	0.283	3.72	7.6 - 6.4 - 4.7	3.24	31
	700	0.331	4.35	8.8 - 7.2 - 5.4	4.20	37
	800	0.378	4.97	9.7 - 7.8 - 5.9	4.83	40

- Data based on one meter length of the diffuser with damper fully opened.
- Face velocity is measured in m/sec.
- P_s : Static pressure loss is in mm of H₂O. Area factor in square meters.
- Throw (meters) is measured for terminal velocities of 0.25, 0.5 & 0.75 m/sec.
- NC based on a room attenuation of 10 dB.

Table 7.2 Air flow data

Number of slots A_k in m ²	Air flow rate per meter length		Face Velocity m/sec	Throw in meters	P_s in mm H ₂ O	Noise Criteria (NC)
	Cfm	m ³ /sec				
1 0.0116	75	0.035	3.02	5.3 - 3.2 - 1.9	0.78	16
	100	0.047	4.05	6.6 - 4.6 - 2.8	1.53	25
	125	0.059	5.09	7.7 - 5.3 - 3.9	2.53	29
	150	0.071	6.12	8.4 - 6.3 - 4.8	3.79	33
	175	0.083	7.15	9.4 - 7.2 - 5.5	4.05	36
	200	0.094	8.10	10.5 - 8.2 - 6.1	5.49	40
2 0.0234	125	0.059	2.52	5.6 - 3.2 - 1.6	0.94	<15
	150	0.071	3.03	6.6 - 4.1 - 2.2	1.36	17
	175	0.083	3.55	7.4 - 5.0 - 3.2	1.91	24
	200	0.094	4.02	7.7 - 5.6 - 4.5	2.13	28
	250	0.118	5.04	8.8 - 6.6 - 5.2	2.75	34
	300	0.142	6.07	10.0 - 7.9 - 6.0	3.93	39
3 0.035	150	0.071	2.03	4.9 - 2.9 - 1.2	0.83	<15
	200	0.094	2.68	5.6 - 3.6 - 2.2	1.28	17
	225	0.106	3.03	6.9 - 4.3 - 3.3	1.96	22
	250	0.118	3.37	7.7 - 5.3 - 3.9	2.13	27
	300	0.142	4.06	8.8 - 6.3 - 4.6	2.73	32
	350	0.165	4.71	10.0 - 7.4 - 5.2	3.71	36
	400	0.189	5.40	10.6 - 7.9 - 5.6	4.15	40
4 0.048	200	0.094	1.96	5.6 - 3.6 - 1.9	0.72	<15
	250	0.118	2.46	6.3 - 4.3 - 2.8	1.39	17
	300	0.142	2.96	7.0 - 4.9 - 3.6	1.92	22
	350	0.165	3.44	7.7 - 5.5 - 4.2	2.64	28
	400	0.189	3.94	8.7 - 6.6 - 4.9	2.97	32
	450	0.213	4.44	9.5 - 7.2 - 5.4	3.42	35
	500	0.236	4.92	10.0 - 7.7 - 6.0	4.18	38
	550	0.26	5.42	10.9 - 8.4 - 6.5	4.63	41

- Data based on one meter length of the diffuser with damper fully opened.
- Face velocity is measured in m/sec.
- P_s : Static pressure loss is in mm of H₂O. Area factor in square meters.
- Throw (meters) is measured for terminal velocities of 0.25, 0.5 & 0.75 m/sec.
- NC based on a room attenuation of 10 dB.

SUPPLY
LINEAR SLOT DIFFUSER

25mm Slot width

Table 7.2(cont.) Air flow data

Number of slots A_s in m ²	Air flow rate per meter length		Face Velocity m/sec	Throw in meters	P_s in mm H ₂ O	Noise Criteria (NC)
	Cfm	m ³ /sec				
5 0.058	300	0.142	2.45	6.6 - 4.5 - 3.5	1.42	17
	350	0.165	2.84	6.9 - 4.9 - 3.6	2.17	23
	400	0.189	3.26	7.4 - 5.2 - 3.9	2.72	26
	450	0.213	3.67	8.0 - 5.9 - 4.5	3.14	31
	500	0.236	4.07	8.8 - 6.7 - 5.2	3.68	33
	550	0.260	4.48	9.6 - 7.5 - 5.8	4.10	36
	600	0.283	4.88	10.6 - 8.4 - 6.6	4.46	38
	650	0.307	5.29	11.6 - 8.8 - 7.1	4.73	41
6 0.071	350	0.165	2.32	6.9 - 5.2 - 3.8	1.49	17
	400	0.189	2.66	7.6 - 5.6 - 4.2	1.84	21
	450	0.213	3.0	8.0 - 5.9 - 4.5	2.21	24
	500	0.236	3.32	8.8 - 6.3 - 4.9	2.94	28
	600	0.283	3.98	9.2 - 6.8 - 5.2	3.69	32
	700	0.331	4.66	10.7 - 8.4 - 6.5	4.26	37
	800	0.378	5.32	12.0 - 9.1 - 7.4	5.13	41
7 0.082	400	0.189	2.30	7.0 - 5.3 - 4.0	1.51	17
	450	0.213	2.60	7.8 - 5.9 - 4.5	1.93	22
	500	0.236	2.88	7.9 - 6.2 - 4.7	2.23	24
	600	0.283	3.45	9.0 - 6.6 - 5.3	3.14	29
	700	0.331	4.04	9.6 - 7.1 - 5.6	3.97	34
	800	0.378	4.61	11.0 - 8.9 - 7.0	4.47	38
	900	0.425	5.18	12.2 - 9.4 - 7.5	5.34	42
8 0.094	500	0.236	2.51	7.2 - 5.6 - 4.2	1.82	18
	600	0.283	3.01	8.5 - 6.3 - 5.0	3.05	28
	700	0.331	3.52	9.3 - 6.8 - 5.5	3.18	31
	800	0.378	4.02	9.8 - 7.4 - 6.0	4.12	35
	900	0.425	4.52	11.3 - 9.2 - 7.3	4.63	39
	1000	0.472	5.02	12.5 - 9.6 - 7.8	5.34	43

- Data based on one meter length of the diffuser with damper fully opened.
- Face velocity is measured in m/sec.
- P_s : Static pressure loss is in mm of H₂O. Area factor in square meters.
- Throw (meters) is measured for terminal velocities of 0.25, 0.5 & 0.75 m/sec.
- NC based on a room attenuation of 10 dB.

Table 7.3 Air flow data

Number of slots A_k in m ²	Air flow rate per meter length		Face Velocity m/sec	Throw in meters	P_s in mm H ₂ O	Noise Criteria (NC)
	Cfm	m ³ /sec				
1 0.0072	30	0.014	1.94	2.5 - 1.5 - 0.4	0.51	<15
	50	0.024	3.33	4.1 - 2.5 - 1.4	1.34	18
	75	0.035	4.86	5.6 - 3.8 - 2.3	2.62	29
	100	0.047	6.53	6.8 - 4.7 - 3.3	4.41	36
	125	0.059	8.19	7.4 - 5.0 - 3.8	5.10	40
	150	0.071	9.86	8.1 - 5.8 - 4.4	7.42	43
2 0.014	50	0.024	1.71	3.0 - 1.6 - 0.6	0.65	<15
	75	0.035	2.50	3.7 - 2.0 - 0.9	1.19	17
	100	0.047	3.36	4.3 - 2.5 - 1.3	1.95	21
	125	0.059	4.21	5.3 - 3.7 - 1.9	2.83	29
	150	0.071	5.07	6.2 - 4.4 - 2.8	3.95	33
	200	0.094	6.71	7.3 - 4.9 - 3.5	6.57	41
3 0.021	100	0.047	2.24	3.5 - 1.9 - 0.8	0.96	17
	125	0.059	2.81	3.9 - 2.2 - 1.1	1.42	21
	150	0.071	3.38	4.9 - 2.8 - 1.7	2.36	25
	175	0.083	3.95	5.3 - 3.4 - 2.1	3.11	30
	200	0.094	4.48	5.9 - 3.9 - 2.4	3.91	36
	250	0.118	5.62	6.9 - 5.2 - 3.3	5.38	39
4 0.028	125	0.059	2.11	3.6 - 2.0 - 0.9	0.84	17
	150	0.071	2.53	3.9 - 2.3 - 1.3	1.49	22
	175	0.083	2.96	4.4 - 3.1 - 1.9	2.0	25
	200	0.094	3.36	5.2 - 3.4 - 2.2	2.73	29
	250	0.120	4.28	5.9 - 4.1 - 2.7	4.03	34
	300	0.142	5.07	6.4 - 4.9 - 3.2	5.0	38

- Data based on one meter length of the diffuser with damper fully opened.
- Face velocity is measured in m/sec.
- P_s : Static pressure loss is in mm of H₂O. Area factor in square meters.
- Throw (meters) is measured for terminal velocities of 0.25, 0.5 & 0.75 m/sec.
- NC based on a room attenuation of 10 dB.

SUPPLY
LINEAR SLOT DIFFUSER

16mm Slot width

Table 7.3(cont.) Air flow data

Number of slots A_x in m ²	Air flow rate per meter length		Face Velocity m/sec	Throw in meters	P_s in mm H ₂ O	Noise Criteria (NC)
	Cfm	m ³ /sec				
5 0.036	150	0.071	1.97	3.7 - 2.1 - 1.0	1.16	16
	200	0.094	2.61	4.1 - 2.5 - 1.5	1.71	23
	250	0.118	3.28	5.2 - 3.4 - 2.2	2.73	29
	300	0.142	3.94	6.0 - 4.2 - 2.8	3.96	32
	350	0.165	4.58	6.4 - 4.9 - 3.2	4.63	35
	400	0.189	5.25	7.3 - 5.5 - 3.7	5.38	39
6 0.043	200	0.094	2.19	3.9 - 2.4 - 1.3	1.37	18
	250	0.118	2.74	4.7 - 2.8 - 1.7	1.61	24
	300	0.142	3.30	5.6 - 3.6 - 2.5	2.46	30
	350	0.165	3.84	6.3 - 4.4 - 3.0	3.53	33
	400	0.189	4.39	6.7 - 5.2 - 3.5	4.48	36
	500	0.236	5.49	7.9 - 5.6 - 4.1	5.77	41
7 0.049	250	0.118	2.41	4.2 - 2.5 - 1.4	1.61	20
	300	0.142	2.90	4.9 - 3.1 - 1.9	1.82	25
	350	0.165	3.37	5.9 - 3.8 - 2.6	2.58	29
	400	0.189	3.86	6.5 - 4.7 - 3.2	3.68	32
	500	0.236	4.82	7.1 - 5.3 - 3	5.0	37
	600	0.283	5.77	8.3 - 5.9 - 4.3	6.06	42
8 0.057	350	0.165	2.89	5.1 - 3.2 - 2.2	2.02	24
	400	0.189	3.31	6.0 - 3.9 - 2.7	2.15	30
	450	0.213	3.74	6.6 - 4.8 - 3.3	3.02	32
	500	0.236	4.14	7.0 - 5.2 - 3.6	3.89	35
	600	0.283	4.96	8.3 - 5.6 - 4.2	5.16	39
	700	0.331	5.81	8.7 - 6.1 - 4.5	6.27	42

- Data based on one meter length of the diffuser with damper fully opened.
- Face velocity is measured in m/sec.
- P_s : Static pressure loss is in mm of H₂O. Area factor in square meters.
- Throw (meters) is measured for terminal velocities of 0.25, 0.5 & 0.75 m/sec.
- NC based on a room attenuation of 10 dB.

Table 7.4 Air flow data

No. of slots							
1	CFM/m	100	150	200	250	300	350
	M ³ /sec/m	0.047	0.071	0.094	0.118	0.142	0.165
	Neg P _s	0.61	1.37	2.41	3.81	5.46	7.37
	NC	<15	19	28	36	42	48
2	CFM m	250	300	350	400	450	500
	M ³ /sec/m	0.118	0.142	0.165	0.189	0.212	0.236
	Neg P _s	1.02	1.47	2.03	2.62	3.30	4.06
	NC	17	22	27	32	36	40
3	CFM/m	350	400	450	500	600	700
	M ³ /sec/m	0.165	0.189	0.212	0.236	0.283	0.331
	Neg P _s	1.04	1.35	1.68	2.08	2.97	4.01
	NC	17	22	25	30	34	40
4	CFM/m	400	500	600	700	800	900
	M ³ /sec/m	0.189	0.236	0.283	0.331	0.378	0.425
	Ne P _s	0.76	1.19	1.73	2.36	3.25	4.06
	NC	15	21	26	30	35	40
5	CFM/m	500	600	700	800	1000	1200
	M ³ /sec/m	0.236	0.283	0.331	0.378	0.472	0.567
	Neg P _s	0.76	1.12	1.52	1.96	3.05	4.37
	NC	15	22	27	30	35	42
6	CFM/m	600	700	800	1000	1200	1400
	M ³ /sec/m	0.283	0.331	0.378	0.472	0.567	0.66
	Neg P _s	0.83	1.08	1.78	2.18	3.53	4.75
	NC	17	24	29	31	37	43
7	CFM/m	700	800	1000	1200	1400	1600
	M ³ /sec/m	0.331	0.378	0.472	0.567	0.66	0.76
	Neg P _s	0.93	1.13	1.83	2.36	3.66	4.75
	NC	18	25	30	33	38	43
8	CFM/m	800	900	1100	1300	1500	1700
	M ³ /sec/m	0.378	0.425	0.52	0.61	0.71	0.8
	Neg P _s	1.02	1.13	96	2.45	3.87	4.93
	NC	18	25	32	35	40	45

- Data based on one meter length of the diffuser.
- NC based on a room attenuation of 10 dB.
- P_s: Static pressure loss is in mm of water.

RETURN
LINEAR SLOT DIFFUSER

25mm Slot width

Table 7.5 Air flow data

No. of slots							
1	CFM/m	100	150	200	250	300	350
	M ³ /sec/m	0.047	0.071	0.094	0.118	0.142	0.165
	Neg P _s	0.51	1.13	1.98	3.09	4.4	5.89
	NC	<15	18	26	33	38	45
2	CFM/m	250	300	350	400	450	500
	M ³ /sec/m	0.118	0.142	0.165	0.189	0.213	0.236
	Neg P _s	0.85	1.22	1.67	2.13	2.66	3.25
	NC	<15	21	25	29	33	37
3	CFM/m	350	400	450	500	600	700
	M ³ /sec/m	0.165	0.189	0.213	0.236	0.283	0.331
	Neg P _s	0.87	1.11	1.37	1.69	2.39	3.21
	NC	16	21	23	28	31	37
4	CFM/m	400	500	600	700	800	900
	M ³ /sec/m	0.189	0.236	0.283	0.331	0.378	0.425
	Neg P _s	0.64	0.99	1.42	1.92	2.62	3.25
	NC	<15	20	24	28	32	37
5	CFM/m	500	600	700	800	1000	1200
	M ³ /sec/m	0.236	0.283	0.331	0.378	0.472	0.567
	Neg P _s	0.64	0.92	1.25	1.59	2.46	3.49
	NC	<15	21	25	27	32	39
6	CFM/m	600	700	800	1000	1200	1400
	M ³ /sec/m	0.283	0.331	0.378	0.472	0.567	0.66
	Neg P _s	0.67	0.83	1.39	1.77	3.85	3.8
	NC	16	23	27	28	34	40
7	CFM/m	700	800	1000	1200	1400	1600
	M ³ /sec/m	0.331	0.378	0.472	0.567	0.66	0.76
	Neg P _s	0.75	0.91	1.48	1.92	2.95	3.8
	NC	17	24	28	29	35	40
8	CFM/m	800	900	1100	1300	1500	1700
	M ³ /sec/m	0.378	0.425	0.52	0.61	0.71	0.8
	Neg P _s	0.83	0.91	1.56	1.99	3.12	3.94
	NC	17	24	30	32	37	42

- Data based on one meter length of the diffuser.
- NC based on a room attenuation of 10 dB.
- P_s: Static pressure loss is in mm of water.

Table 7.6 Air flow data

No. of slots							
1	CFM/m	100	150	200	250	300	350
	M ³ /sec/m	0.047	0.071	0.094	0.118	0.142	0.165
	Neg P _s	0.7	1.59	2.82	4.49	6.49	8.84
	NC	17	21	30	38	45	52
2	CFM/m	250	300	350	400	450	500
	M ³ /sec/m	0.118	0.142	0.165	0.189	0.213	0.236
	Neg P _s	1.17	1.71	2.38	3.09	3.93	4.88
	NC	20	26	31	37	42	46
3	CFM/m	350	400	450	500	600	700
	M ³ /sec/m	0.165	0.189	0.213	0.236	0.283	0.331
	Neg P _s	1.19	1.56	1.96	2.42	3.54	4.82
	NC	20	26	29	34	40	46
4	CFM/m	400	500	600	700	800	900
	M ³ /sec/m	0.189	0.236	0.283	0.331	0.378	0.425
	Neg P _s	0.88	1.38	2.02	2.78	3.87	4.88
	NC	17	25	30	35	41	47
5	CFM/m	500	600	700	800	1000	1200
	M ³ /sec/m	0.236	0.283	0.331	0.378	0.472	0.567
	Neg P _s	0.88	1.29	1.78	2.31	3.63	5.24
	NC	17	26	29	35	41	48
6	CFM/m	600	700	800	1000	1200	1400
	M ³ /sec/m	0.283	0.331	0.378	0.472	0.567	0.66
	Neg P _s	0.96	1.25	2.08	2.57	4.20	5.7
	NC	19	28	34	37	40	49
7	CFM/m	700	800	1000	1200	1400	1600
	M ³ /sec/m	0.331	0.378	0.472	0.567	0.66	0.76
	Neg P _s	1.07	1.38	2.14	2.78	4.36	5.7
	NC	20	28	33	39	43	50
8	CFM/m	800	900	1100	1300	1500	1700
	M ³ /sec/m	0.378	0.425	0.52	0.61	0.71	0.8
	Neg P _s	1.17	1.31	2.29	2.89	4.61	5.9
	NC	22	31	37	40	45	50

- Data based on one meter length of the diffuser.
- NC based on a room attenuation of 10 dB.
- P_s: Static pressure loss is in mm of water.
- Above data is tested & certified by ETL

**CONSTRUCTION:**

Frame & Blades: High quality extruded aluminium profiles.

Slot width: 19mm as standard.

Number of slots available: 1,2,3,4,5,6,7,8.

Length: Up to 5.8 meters available in a single piece.



Optional accessories: Plenum box either un-lined, internally insulated or externally insulated.

Description:

- Frame and deflection blades are made of high quality extruded aluminium profiled construction with the advantages of corrosion resistance and rigidity.
- This high capacity linear flow air diffuser is designed to achieve best possible horizontal air pattern with excellent static pressure, throw and sound characteristics.
- The diffuser is equipped with removable pattern control device that allows access for installation and balancing with option of choosing the black/white extruded aluminium pattern control device which allows 180° pattern adjustment and volume control in the same unit (without using damper).
- Positive alignment of adjacent sections can be made by using alignment strips.
- Foam gasket is sealed around the back of the frame as option to avoid air leakage.

Standard finishes:

- Natural anodized aluminium finish.
- Powder coated colour finish as per RAL colour code.
- Flexibility of finish available as option.

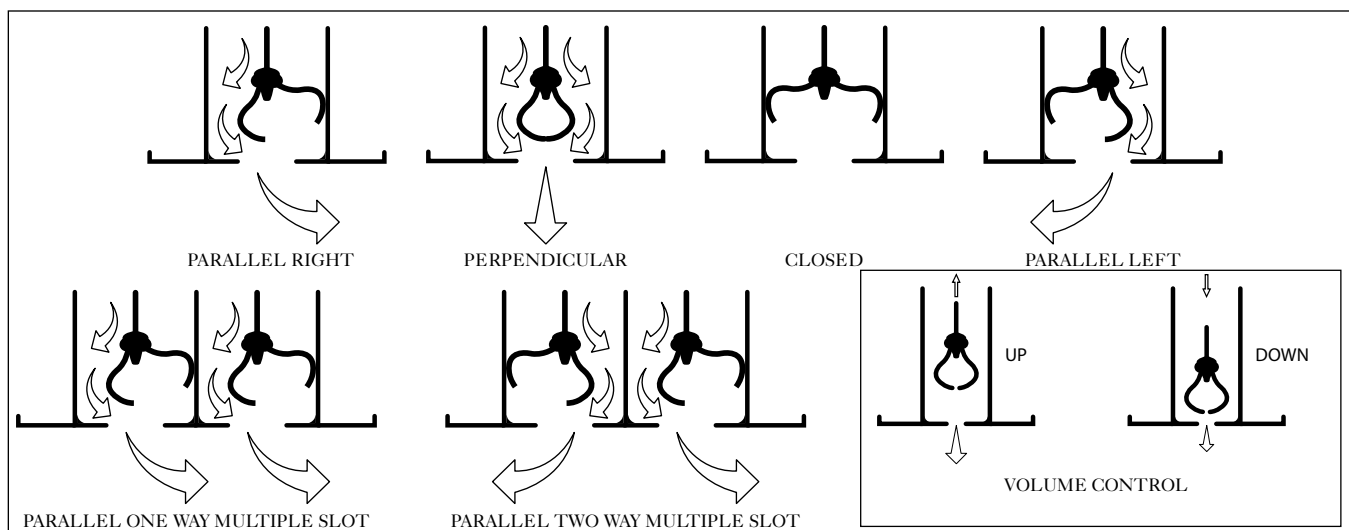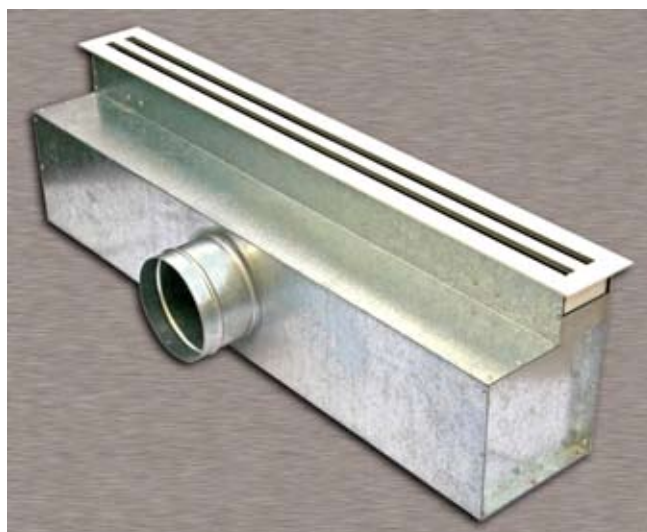

Air flow data

1 slot	Airflow Cfm	80	88	99	109	119	130	143	155	168
	M ³ /sec	0.038	0.042	0.047	0.051	0.056	0.061	0.067	0.073	0.079
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	2.1-4.0-5.5	2.4-4.3-5.8	3.0-4.6-6.1	3.4-4.9-6.4	3.7-5.2-6.7	4.0-5.5-7.0	4.3-5.8-7.3	4.6-5.8-7.3	4.6-6.1-7.6
	NC	<15	<15	<15	17	20	22	25	29	32

2 slot	Airflow Cfm	132	146	166	182	196	215	237	256	278
	M ³ /sec	0.062	0.069	0.078	0.085	0.092	0.101	0.112	0.121	0.131
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.8-3.6-5.5	2.1-4.0-5.8	2.7-4.6-6.4	3.0-4.9-6.7	3.5-4.9-7.0	3.7-5.2-7.0	3.7-5.2-7.3	4.0-5.5-7.3	4.0-5.8-7.6
	NC	<15	<15	19	22	24	26	29	31	34

3 slot	Airflow Cfm	178	196	223	244	266	290	320	345	375
	M ³ /sec	0.084	0.092	0.105	0.115	0.125	0.137	0.151	0.163	0.177
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.2-2.7-4.3	1.5-3.0-4.6	2.1-3.7-5.2	2.4-4.3-5.8	2.7-4.6-6.4	3.0-4.9-6.7	3.3-5.2-7.0	3.7-5.5-7.3	4.0-5.8-7.6
	NC	15	17	21	23	26	28	31	33	36

4 slot	Airflow Cfm	232	257	290	320	346	380	418	452	490
	M ³ /sec	0.109	0.121	0.137	0.151	0.163	0.179	0.197	0.213	0.231
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.2-2.4-4.0	1.5-2.7-4.3	1.8-3.3-4.9	2.1-3.7-5.5	2.4-4.0-6.1	3.0-4.6-6.7	3.3-4.9-7.0	3.7-5.2-7.0	4.0-5.5-7.6
	NC	16	19	23	25	28	30	33	36	40

5 slot	Airflow Cfm	306	338	382	422	456	500	550	595	645
	M ³ /sec	0.144	0.159	0.180	0.199	0.215	0.236	0.259	0.281	0.304
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.2-2.1-4.0	1.5-2.4-4.3	1.8-2.7-4.9	2.1-3.0-5.2	2.7-3.6-5.8	3.0-4.3-6.4	3.3-4.9-6.7	3.7-5.2-7.0	4.0-5.5-7.3
	NC	18	21	25	27	30	33	36	40	44

6 slot	Airflow Cfm	380	420	473	522	565	620	680	740	800
	M ³ /sec	0.179	0.198	0.223	0.246	0.267	0.293	0.321	0.349	0.377
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.2-2.1-4.0	1.5-2.4-4.6	1.8-2.7-4.9	2.1-3.4-5.5	2.7-4.0-5.8	2.7-4.6-6.4	3.0-4.6-6.7	3.3-4.9-7.0	3.7-5.2-7.0
	NC	18	21	25	28	31	35	38	41	45



Air flow data (cont.)

7 slot	Airflow Cfm	460	510	570	630	685	750	825	890	970
	M ³ /sec	0.217	0.241	0.269	0.297	0.323	0.354	0.389	0.420	0.458
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.2-2.1-4.3	1.5-2.4-4.6	1.8-2.7-4.9	2.1-3.4-5.2	2.7-4.0-5.8	2.7-4.3-6.1	3.0-4.6-6.4	3.3-4.9-6.7	3.7-5.2-7.0
	NC	19	22	26	29	32	36	39	42	46

8 slot	Airflow Cfm	540	595	675	740	805	880	970	1050	1140
	M ³ /sec	0.255	0.281	0.318	0.349	0.380	0.415	0.458	0.495	0.538
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.2-2.1-4.3	1.5-2.4-4.6	1.8-2.7-4.9	2.1-3.4-5.2	2.4-4.0-5.8	2.7-4.3-6.1	3.0-4.6-6.4	3.3-4.9-6.7	3.7-5.2-7.0
	NC	20	23	27	30	33	36	39	42	47

- Neck velocity is measured in m/sec.
- P_s: Static pressure loss across the diffuser is in mm of H₂O.
- Throw (meters) is measured for terminal velocities of 0.75, 0.5 & 0.25 m/sec.
- Noise criteria (NC) based on a room attenuation of 10 dB.

Seef Mall Food Court, Bahrain



PLENUM SLOT DIFFUSER

model: **ASMPD**

CONSTRUCTION:

Frame & Blades: 22 or 20 gauge galvanized steel sheet.

Blades: High quality extruded aluminium profile.

Slot width: 19mm as standard.

Number of slots available: 1, 2, 3, 4.

Length: 600mm, 900mm & 1200mm standard.

Spigots: Circular spigots of 50mm length as standard.



Optional accessories: Internal insulation, volume control damper.

Description:

- Frame fabricated from 22 or 20 gauge galvanized steel sheet and deflection blades are made of high quality extruded aluminium profiles.
- This high capacity plenum slot diffuser is designed to achieve best possible horizontal air pattern with excellent static pressure, throw and sound characteristics.
- The diffuser is equipped with removable pattern control device that allows access for installation and balancing with option of choosing the black/white extruded aluminium pattern control device which allows 180° pattern adjustment and volume control in the same unit (without using damper).
- Circular spigots of required diameter and standard length of 50mm would be fixed to the plenum box.
- Volume control dampers can be fixed to the spigots on request.

Standard finishes:

- Deflection blades can be of natural anodized aluminium finish or powder coated color finish as per RAL color codes.
- Flexibility of finish available.

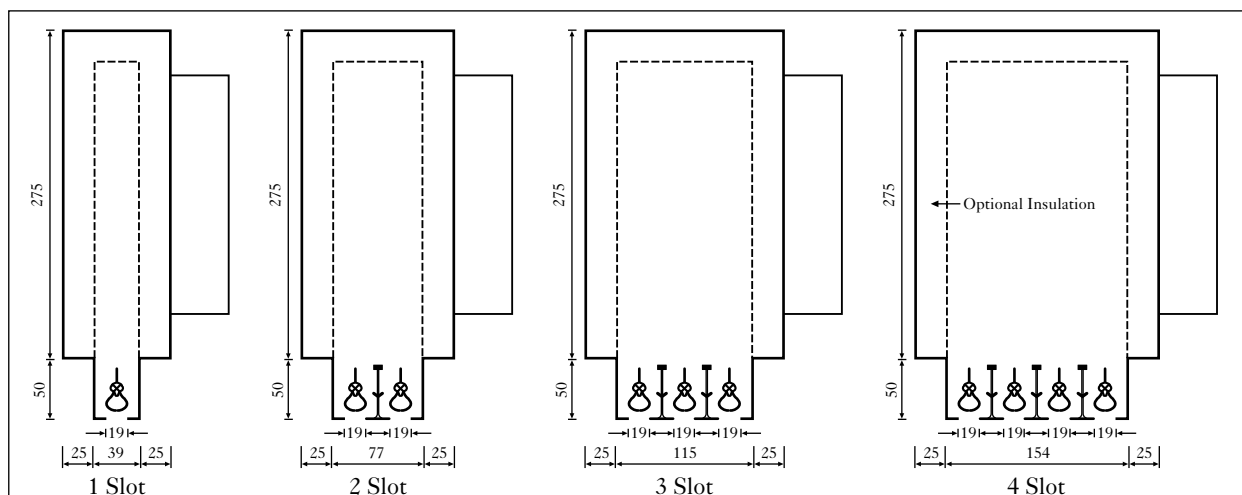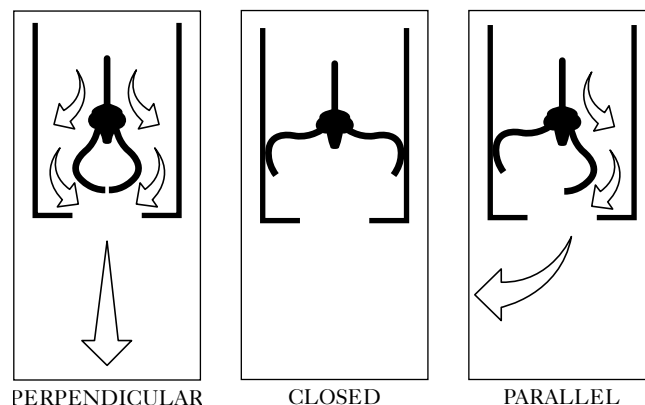

**Air flow data**

1 slot	Airflow Cfm	80	88	99	109	119	130	143	155	168
	M ³ /sec	0.038	0.042	0.047	0.051	0.056	0.061	0.067	0.073	0.079
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	2.1-4.0-5.5	2.4-4.3-5.8	3.0-4.6-6.1	3.4-4.9-6.4	3.7-5.2-6.7	4.0-5.5-7.0	4.3-5.8-7.3	4.6-5.8-7.3	4.6-6.1-7.6
	NC	<15	<15	<15	17	20	22	25	29	32

2 slot	Airflow Cfm	132	146	166	182	196	215	237	256	278
	M ³ /sec	0.062	0.069	0.078	0.085	0.092	0.101	0.112	0.121	0.131
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.8-3.6-5.5	2.1-4.0-5.8	2.7-4.6-6.4	3.0-4.9-6.7	3.5-4.9-7.0	3.7-5.2-7.0	3.7-5.2-7.3	4.0-5.5-7.3	4.0-5.8-7.6
	NC	<15	<15	19	22	24	26	29	31	34

3 slot	Airflow Cfm	178	196	223	244	266	290	320	345	375
	M ³ /sec	0.084	0.092	0.105	0.115	0.125	0.137	0.151	0.163	0.177
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.2-2.7-4.3	1.5-3.0-4.6	2.1-3.7-5.2	2.4-4.3-5.8	2.7-4.6-6.4	3.0-4.9-6.7	3.3-5.2-7.0	3.7-5.5-7.3	4.0-5.8-7.6
	NC	15	17	21	23	26	28	31	33	36

4 slot	Airflow Cfm	232	257	290	320	346	380	418	452	490
	M ³ /sec	0.109	0.121	0.137	0.151	0.163	0.179	0.197	0.213	0.231
	P _s in mm H ₂ O	1.14	1.40	1.78	2.16	2.54	3.05	3.68	4.32	5.08
	Throw in m	1.2-2.4-4.0	1.5-2.7-4.3	1.8-3.3-4.9	2.1-3.7-5.5	2.4-4.0-6.1	3.0-4.6-6.7	3.3-4.9-7.0	3.7-5.2-7.0	4.0-5.5-7.6
	NC	16	19	23	25	28	30	33	36	40

- Neck velocity is measured in m/sec.
- P_s: Static pressure loss across the diffuser s in mm of H₂O.
- Throw (meters) is measured for terminal velocities of 0.75, 0.5 & 0.25 m/sec.
- Noise criteria (NC) based on a room attenuation of 10 dB.

Product summary:

Model Number	Product Description	Remarks
ASLD	Supply linear slot diffuser	
ARLD	Return linear slot diffuser	
ASLD (C)	SLD curved	
ARLD (C)	RLD curved	
ASMLD	Slot diffuser – 19mm slot	With Removable pattern control device
ASMPD	Plenum Slot diffuser – 19 mm slot	With Removable pattern control device

Product order checklist:

- Model: Please refer product summary above
- Number of slots
- Slot width
- End flange/cap details (open end, one side flange/end cap or both side flange/caps)
- Quantity
- Colour (RAL 9010, 9016, Anodised aluminium finish or other RAL colours)
- Drawing or template necessary for curved slot diffusers.

Etisalat building, Dubai.





AIR MASTER EQUIPMENTS EMIRATES LLC.
Post Box - 3180, Ajman, U.A.E.
Tel: +971 6 7436900, 7439600 Fax: +971 6 7436700
E-mail: airmastr@eim.ae, sales@airmaster.ae